


Class 6

Intermediate Pressure Square-Head Cylinders

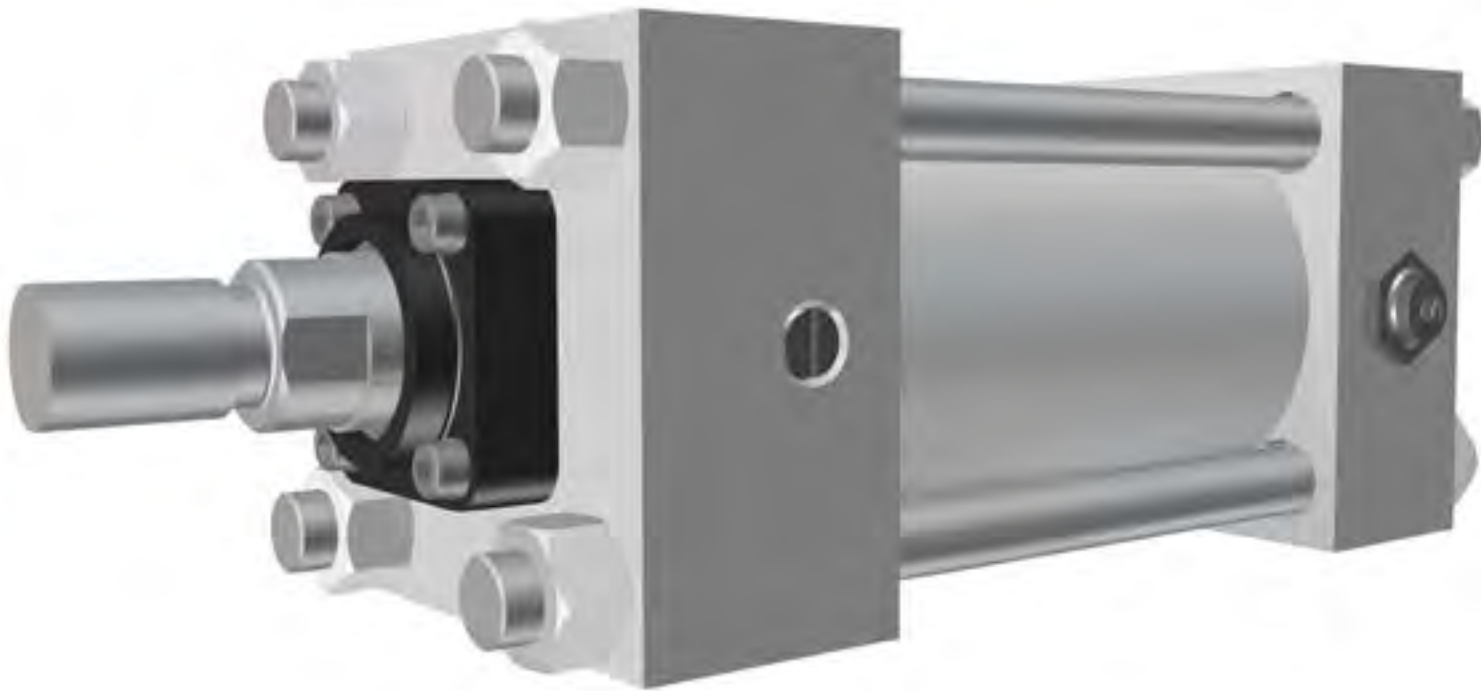

HOW TO ORDER

YOU CAN HELP ENSURE PROMPT PROCESSING OF YOUR ORDER BY INCLUDING ALL OF THE FOLLOWING REQUESTED INFORMATION:

1. Quantity required.
2. Operating medium: Series P6 or H6.
P for pneumatic and H for hydraulic.
3. Bore size.
4. Stroke length in inches.
5. Type of mounting (NOPAK Model or NFPA STD. style).
6. Type of cushioning:
 NN = non-cushioned
 NA = cushioned blind end
 AN = cushioned rod end
 AA = cushioned both ends
7. Piston rod diameter and type of rod threading - specify Type 1, 3, 4, 5, 6 or 7. See page 130.


ALSO SPECIFY:

1. Position of cylinder ports and cushion adjustment screws, if other than standard. Standard positions are:
 National pipe thread inlets - position 1
 Ball check - position 2
 Cushion adjustment - position 4
2. Extreme high or low operating or ambient temperatures.
3. Type of hydraulic fluid if other than standard petroleum base oil.
4. Any unusual operating conditions.

ORDERING CODE EXAMPLE

CLP6 - 8 x 18 - A - ΔΔ - 1-3/8 - 4

Any special requirements should be described IN WORDS below model number.

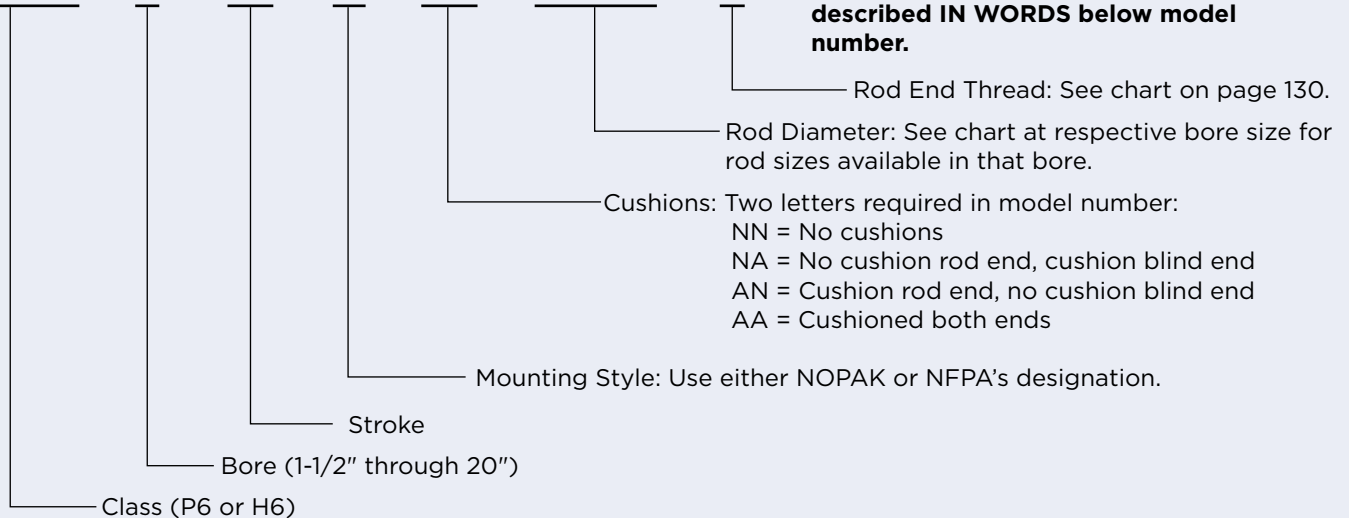

MODEL EU3 (NFPA STD. MPU3)

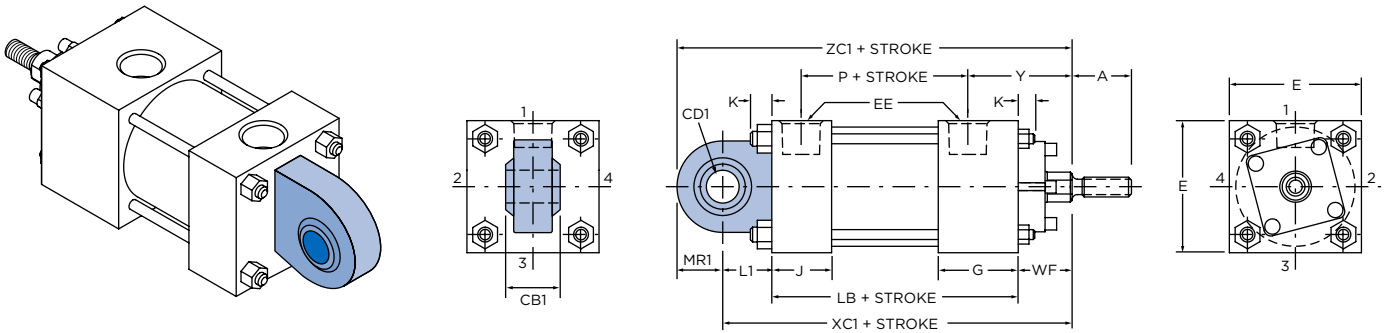


Table 1 These dimensions are constant regardless of rod diameter or stroke.

BORE DIA.	E	G	J	K	EE	L1	CB1	CD1	MR1	PRESSURE RATING
1-1/2	2	1-1/2	1-1/8	1/4	3/8	3/4	7/16	1/2	7/8	1750 PSI
2	2-1/2	1-1/2	1-1/8	3/8	3/8	3/4	7/16	1/2	7/8	980 PSI
2-1/2	3	1-1/2	1-1/8	3/8	3/8	3/4	7/16	1/2	7/8	630 PSI
3-1/4	3-3/4	1-3/4	1-1/4	7/16	1/2	1-1/4	21/32	3/4	1-1/4	830 PSI
4	4-1/2	1-3/4	1-1/4	7/16	1/2	1-1/4	21/32	3/4	1-1/4	550 PSI
5	5-1/2	1-3/4	1-1/4	1/2	1/2	1-1/4	21/32	3/4	1-1/4	350 PSI
6	6-1/2	2	1-1/2	9/16	3/4	1-1/2	7/8	1	1-1/2	440 PSI

SPHERICAL EYE MOUNT CYLINDERS

1-1/2" THROUGH 6" DIAMETER

Table 2 The dimensions given on this table are affected by the piston rod diameter and the stroke.

• = For piston rod dimensions see page 130.

BORE DIA.	ROD MM•	A	P	W	Y	LB	WF	XC1	ZC1
1-1/2	5/8	3/4	2-1/8	5/8	1-15/16	3-5/8	1	5-3/8	6-1/8
	1	1-1/8	2-1/8	1	2-5/16	3-5/8	1-3/8	5-3/4	6-1/2
2	5/8	3/4	2-1/8	5/8	1-15/16	3-5/8	1	5-3/8	6-1/8
	1	1-1/8	2-1/8	1	2-5/16	3-5/8	1-3/8	5-3/4	6-1/2
	1-3/8	1-5/8	2-1/8	1-1/4	2-9/16	3-5/8	1-5/8	6	6-3/4
2-1/2	5/8	3/4	2-1/4	5/8	1-15/16	3-3/4	1	5-1/2	6-1/4
	1	1-1/8	2-1/4	1	2-5/16	3-3/4	1-3/8	5-7/8	5-5/8
	1-3/8	1-5/8	2-1/4	1-1/4	2-9/16	3-3/4	1-5/8	6-1/8	6-7/8
	1-3/4	2	2-1/4	1-1/2	2-13/16	3-3/4	1-7/8	6-3/8	7-1/8
3-1/4	1	1-1/8	2-1/2	3/4	2-1/2	4-1/4	1-3/8	6-7/8	8-1/16
	1-3/8	1-5/8	2-1/2	1	2-3/4	4-1/4	1-5/8	7-1/8	8-5/16
	1-3/4	2	2-1/2	1-1/4	3	4-1/4	1-7/8	7-3/8	8-9/16
	2	2-1/4	2-1/2	1-3/8	3-1/8	4-1/4	2	7-1/2	8-11/16
4	1	1-1/8	2-1/2	3/4	2-1/2	4-1/4	1-3/8	6-7/8	8-1/16
	1-3/8	1-5/8	2-1/2	1	2-3/4	4-1/4	1-5/8	7-1/8	8-5/16
	1-3/4	2	2-1/2	1-1/4	3	4-1/4	1-7/8	7-3/8	8-9/16
	2	2-1/4	2-1/2	1-3/8	3-1/8	4-1/4	2	7-1/2	8-11/16
	2-1/2	3	2-1/2	1-5/8	3-3/8	4-1/4	2-1/4	7-3/4	8-15/16
5	1	1-1/8	2-3/4	3/4	2-1/2	4-1/2	1-3/8	7-1/8	8-5/16
	1-3/8	1-5/8	2-3/4	1	2-3/4	4-1/2	1-5/8	7-3/8	8-9/16
	1-3/4	2	2-3/4	1-1/4	3	4-1/2	1-7/8	7-5/8	8-13/16
	2	2-1/4	2-3/4	1-3/8	3-1/8	4-1/2	2	7-3/4	8-15/16
	2-1/2	3	2-3/4	1-5/8	3-3/8	4-1/2	2-1/4	8	9-3/16
	3	3-1/2	2-3/4	1-5/8	3-3/8	4-1/2	2-1/4	8	9-3/16
	3-1/2	3-1/2	2-3/4	1-5/8	3-3/8	4-1/2	2-1/4	8	9-3/16
6	1-3/8	1-5/8	3-1/8	7/8	2-13/16	5	1-5/8	8-1/8	9-5/8
	1-3/4	2	3-1/8	1-1/8	3-1/16	5	1-7/8	8-3/8	9-7/8
	2	2-1/4	3-1/8	1-1/4	3-3/16	5	2	8-1/2	10
	2-1/2	3	3-1/8	1-1/2	3-7/16	5	2-1/4	8-3/4	10-1/4
	3	3-1/2	3-1/8	-	3-3/16	5	-	8-3/4	10-1/4
	3-1/2	3-1/2	3-1/8	-	3-7/16	5	-	8-3/4	10-1/4
	4	4	3-1/8	-	-	5	-	8-3/4	10-1/4